



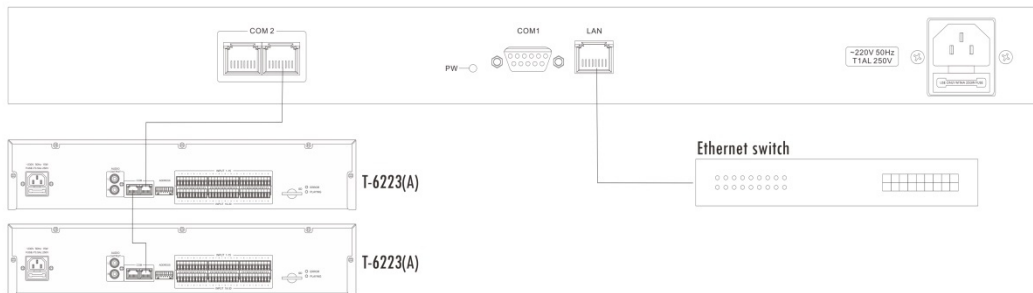

Data Converter

T-6713

Embedded software: digital IP network terminal embedded software V2.0

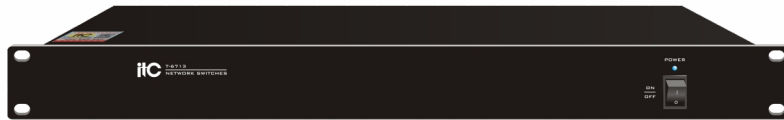

Descriptions

Work with the fire signal interface or wireless remote control suite, for conversion of RS-422/RS-232 protocol and TCP/IP protocol.

Features

- * With standard cabinet design (1U), black alumina panel drawing, the hand of humanity, sophisticated technology, show high-grade temperament.
- * The 2 channel RS-422 protocol RJ45 input interface, 1 channel RS-232 protocol DB9 input interface.
- * Support DHCP compatible routers, switches, bridges, gateway, Modem, Internet, 2G, 3G, 4G, multicast, unicast arbitrary network structure.
- * The 1 channel PC machine serial download IP address, IP address decoding module is used to modify the network.
- * there is Ethernet can access, support cross network and cross routing.

Specifications:

Model	T-6713
Communication Interface	DB9/RJ45
Communication Protocol	RS-232/RS-422
Communication Rate	4800/9600bps
Environmental Temperature	5°C~40°C
Environmental Humidity	20%~80% Relative humidity, condensation free
Environmental Humidity	≤10W
Power Supply	~220V 50Hz
Size	484 x 209 x 44mm
Weight	2.72Kg