



Wall Mount Speaker (Dampproof)


T-774/T-775/T-776/T-774W/T-775W/T-776W



T-774 T-775 T-776

Material: plastic

T-774W T-775W T-776W

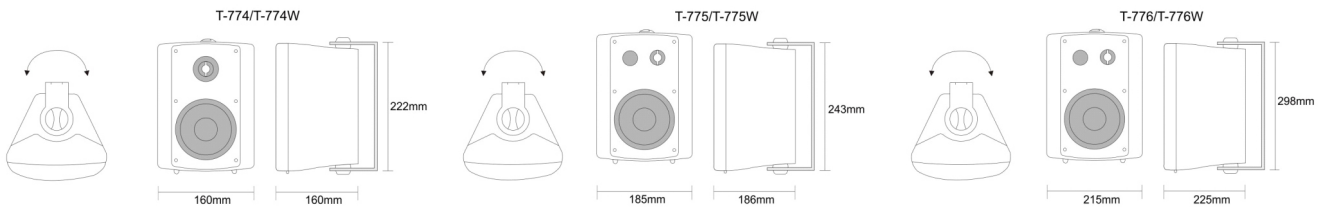

Description:

Indoor wall-mounted speakers, plastic case, iron punching net, 2 frequency division design, using silk retina high pitch, clear and soft sound. Convenient and quick installation mode, can be fixed resistance and fixed pressure multi-power selection (P/PW) series. Suitable for hotels, conference halls, etc.

Specifications:

Model	T-774/T-774W	T-775/T-775W	T-776/T-776W
Power taps @100V	15W	30W	45W
Power taps @70V	7.5W	15W	22.5W
Impedance	Black: Com Red: 670Ω	Black: Com Red: 330Ω	Black: Com Red: 220Ω
SPL(1W/1M)	88dB±3dB	91dB±3dB	91dB±3dB
Frequency response (-10dB)	130-18KHz	130-18KHz	110-18KHz
Speaker driver	4" x 1 1.5" x 1	5" x 1 1.5" x 1	6" x 1 1.5" x 1
Dimensions	222 x 160 x 160mm	243 x 185 x 186mm	298 x 215 x 225mm
Weight	1.8Kg	2.3Kg	3.7Kg
IP rate	IP66	IP66	IP66