




# Remote Zone Paging Mic

## T-328

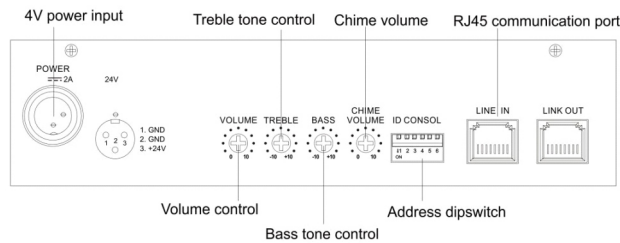

### Descriptions:

\* The T-328 remote paging microphone works together with T-6245 mixer for remote control and announcement.

\* Its 6 zone selectors provide a direct control interface for use to easily control and zone paging. The alarm button will automatically activate the pre-recorded message 3 over other aux inputs. It could be power supplied by the mixer

\* With 50 meters, while extra DC 24V power supply is needed when distance is longer.

The 2 RJ45 communication ports is used to communicate with the mixer and next paging console.

\* Dipswitch could be distinguished by the mixer makes 6 paging consoles work simultaneously possible.

### Feature:

\* Zone selection

Push the switch for one zone or all zone and the zone LED turn on.

\* Announcement

After selecting the zone where to make the announcement, then keep pushing the talk button till the LED turn on, the internal chime will be heard, after that, the user could proceed with the announcement.

If the zone selected is already taken by another connected paging console, the talk LED starts blinking which means line is busy.

\* Pre-recorded message 3 remote trigger

After selecting the zones, push the alarm button to activate the pre-recorded voice message 3 broadcasting. Based on the setting of continuous and once play modes from T-6245, the accordingly activity will be taken.

\* Priority

The remote paging announcement with priority over mic1, chime and pre recorded message broadcasting.

\* Pre-recorded messages

Three different voice messages could be recorded and stored in the mixer, while each message's broadcasting time max is 3 minutes.

\* Capacity of 6 paging consoles working at the same time.

### Specifications:

Model	T-328
MIRCOPHONE INPUT	
Sensitivity	±5 mV/600Ω
S/N Ratio	>68dB
Frequency Response	100Hz~17KHz (+1, -3dB)
Phantom Power	+12V
CONTROL	
Bass	±12dB at 100Hz
Treble	±12dB at 10KHz
Chime	2 tone active for contact free in priority and BGM
Normal Distortion	>0.1%
OPERATING CONDITION	
Power Supply	DC 24V
Dimensions	216 x 141 x 52 mm
Weight	1.5Kg
Max Number of Paging Console	6