



# Ceiling Speaker (Coaxial Speaker)



## T-205A/T-206A/T-208A



T-205A

T-206A

T-208A

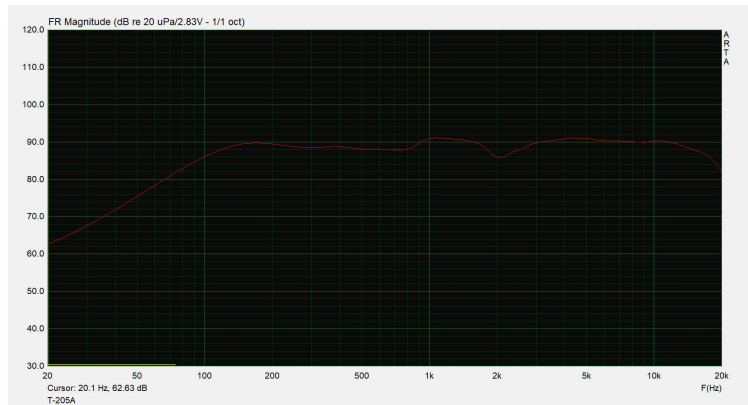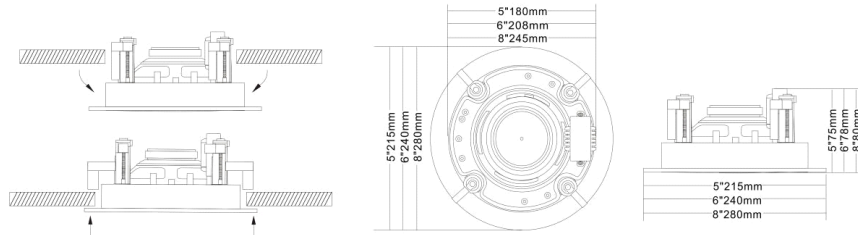

### Specifications:

| Model                      | T-205A   | T-206A  | T-208A   |
|----------------------------|--|---|--|
| Power taps @100V           | 1.25W, 2.5W, 5W, 10W                                   | 2.5W, 5W, 10W, 20W                                      | 3.75W, 7.5W, 15W, 30W  |
| Power taps @70V            | 0.65W, 1.25W, 2.5W, 5W                                 | 1.25W, 2.5W, 5W, 10W                                    | 1.87W, 3.75W, 7.5W, 15W                                      |
| Impedance                  | Black: Com Blue: 8KΩ Red: 4KΩ<br>Green: 2KΩ White: 1KΩ | Black: Com Blue: 4KΩ Red: 2KΩ<br>Green: 1KΩ White: 500Ω | Black: Com Blue: 2.6KΩ Red: 1.3KΩ<br>Green: 670Ω White: 330Ω |
| SPL(1W/1M)                 | 89dB   | 92dB  | 94dB   |
| Max. SPL (Rated W/1M)      | 99dB   | 105dB   | 109dB  |
| Frequency response (-10dB) | 80Hz -20KHz  | 70Hz -20KHz   | 60Hz -20KHz  |
| Finish                     | Baffle: ABS, White Grille: Steel, White                | Baffle: ABS, White Grille: Steel, White                 | Baffle: ABS, White Grille: Steel, White                      |
| Speaker driver             | 5" x 1 1.5" x 1  | 6" x 1 1.5" x 1   | 8" x 1 1.5" x 1  |
| Cutout size                | 180mm  | 208mm   | 245mm  |
| Dimensions                 | 215 x 75mm   | 240 x 78mm  | 280 x 80mm   |
| Weight                     | 0.8Kg  | 1.2Kg   | 1.6Kg  |
| Mounting                   | Flush-mount dog ears                                   | Flush-mount dog ears                                    | Flush-mount dog ears   |